



A30R

Incasso Rotondo
Round recessed luminaire
Runde Einbauleuchte

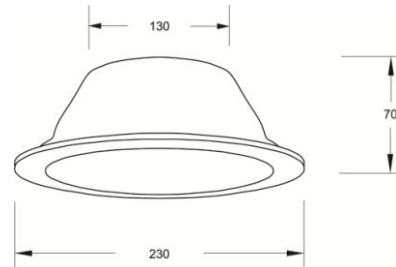

Caratteristiche del prodotto / Product characteristics / Leuchtensystemeigenschaften

Tipo di installazione / Type of Installation / Montageart:	incasso / recessed ceiling mounting / Deckeneinbau
Tipo di protezione / Type of protection / Schutzart:	IP 20
Sorgente / Light source / Lichtquelle:	LED
Sistema di controllo / Control gear / Betriebsgerät:	on-off, DALI, OpenDMX
Range Dimmer / Reichweitendimmer:	0-100% (Step 0,25%)
Voltaggio / Voltage / Spannung:	220 V
Potenza totale / Total power / Anschlußleistung:	24 W (8,6 W → 24W DIP switch)
Flusso Luminoso / Rated luminous flux / Bemessungs-Lichtstrom:	2310 lm
Efficienza apparecchio / Luminaire efficacy / Leuchtenlichtausbeute:	96.25 lm/W (per/for/für 4000K)
Temperatura di colore / Colour temperature / Farbtemperatur:	2700 / 3000 / 3500 / 4000 / 4500 / 5000 K
Indice resa cromatica / Colour rendering index / Farbwiedergabeindex:	90
Angolo di apertura / Beam angle / Ausstrahlungswinkel:	160°
Tempo di vita / Lifetime / Lebensdauer:	>75000 h (L85)
Dimensioni / Dimensions / Abmessungen:	Ø _{max} 230 mm x h 70 mm (Ø _{min} 130 mm)
Foro di preparazione / Preparation hole / Einbauöffnung:	Ø 215 mm
Peso / Weight / Gewicht:	0,4 Kg
Colore / Colour / Lieferbare Farbe:	Argento / Silver / Silber Metallic

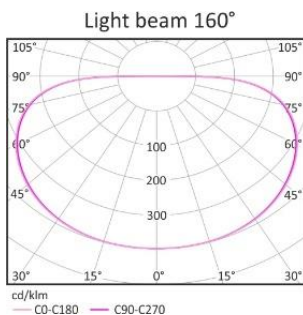


Installazione / Installation / Installation:

Ad incasso sul controsoffitto tramite molle in filo di acciaio anti-caduta.
 Recessed in a false ceiling by means of an anti-fall steel wire spring.
 Mittels Stahldraht-Federn mit Herabfallschutzsystem in abgehängte Decken.

Modelli / Model / Modelle:


Downlight ad incasso / Recessed mounted downlights / Einbau-Downlights

	MODEL	LIGHT COLOUR	SYSTEM POWER	RATED LUMINOUS FLUX	CONTROL GEAR	EMERGENCY LIGHTING
	A30R-F	From 2700 to 5000 K	24 W	2310 lm	No Dimmable	
	A30R-FE	From 2700 to 5000 K	24 W	2310 lm	No Dimmable	✓
	A30R-D	From 2700 to 5000 K	24 W	2310 lm	DALI	
	A30R-DE	From 2700 to 5000 K	24 W	2310 lm	DALI	✓
	A30R-O	From 2700 to 5000 K	24 W	2310 lm	Open DMX	
	A30R-OE	From 2700 to 5000 K	24 W	2310 lm	Open DMX	✓

Codice prodotto / Product code / Produktcode:

A30R	FE	40	90	160
MODEL	CONTROL GEAR	LIGHT COLOUR	CRI	BEAM ANGLE
A30R <i>R = recessed</i>	F <i>on-off</i>	27 2700 K	90	160°
A30C <i>C = ceiling</i>	D <i>DALI</i>	30 3000 K		
	O <i>OpenDMX</i>	35 3500 K		
	E <i>Emergency</i>	40 4000 K		
		45 4500 K		
		50 5000 K		


Schema di Collegamento / Connection diagram / Verbindung:

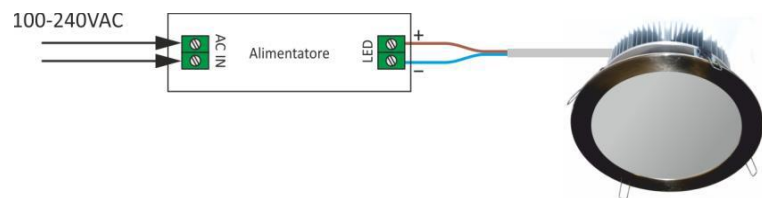

This document is confidential, and is the property of LUX Italia, that owns the copyright. The contents of this document is subject to change without notice. Customers are advised to consult LUX Italia sales representatives before ordering. Copyright © LUX Italia. All rights reserved – www.luxitalia.eu

Riduzione potenza in fase di installazione / Power reduction during installation / Leistungsreduzierung während der Installation:

 DIP switch



A30					
FLUSSO	LOUT (mA)	1	2	3	4
36%	250	OFF	OFF	OFF	OFF
43%	300	OFF	OFF	OFF	ON
50%	350	OFF	OFF	ON	OFF
57%	400	OFF	OFF	ON	ON
64%	450	OFF	ON	OFF	OFF
71%	500	OFF	ON	OFF	ON
79%	550	OFF	ON	ON	OFF
86%	600	OFF	ON	ON	ON
93%	650	ON	OFF	OFF	OFF
100%	700	ON	OFF	OFF	ON
107%	750	ON	OFF	ON	OFF
114%	800	ON	OFF	ON	ON
121%	850	ON	ON	OFF	OFF
129%	900	ON	ON	OFF	ON
136%	950	ON	ON	ON	OFF
143%	1000	ON	ON	ON	ON

This document is confidential, and is the property of LUX Italia, that owns the copyright. The contents of this document is subject to change without notice. Customers are advised to consult LUX Italia sales representatives before ordering. Copyright © LUX Italia. All rights reserved – www.luxitalia.eu

LUX Italia srl – Viale delle Industrie 34, 20040 Cambiagio (MI) – Italy | T +39 02 9530 8160 ; F +39 02 9534 6438
Sales information: sales@luxitalia.eu ; Other information: info@luxitalia.eu