



A45R

Incasso Rotondo
Round recessed luminaire
Runde Einbauleuchte

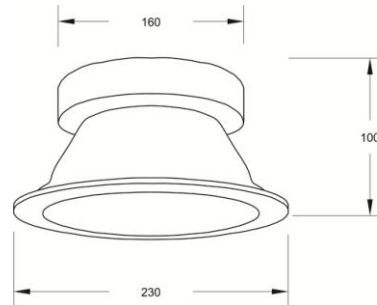

Caratteristiche del prodotto / Product characteristics / Leuchtensystemeigenschaften

Tipo di installazione / Type of Installation / Montageart:	incasso / recessed ceiling mounting / Deckeneinbau
Tipo di protezione / Type of protection / Schutzart:	IP 20
Sorgente / Light source / Lichtquelle:	LED (CREE/Osram/Samsung)
Sistema di controllo / Control gear / Betriebsgerät:	on-off, DALI, OpenDMX
Range Dimmer / Reichweitendimmer:	0-100% (Step 0,25%)
Voltaggio / Voltage / Spannung:	220 V
Potenza totale / Total power / Anschlußleistung:	31 W (12,4 W → 31 W DIP switch)
Flusso Luminoso / Rated luminous flux / Bemessungs-Lichtstrom:	3480 lm
Efficienza apparecchio / Luminaire efficacy / Leuchtenlichtausbeute:	112,25 lm/W (per/for/für 4000K)
Temperatura di colore / Colour temperature / Farbtemperatur:	2700 / 3000 / 3500 / 4000 / 4500 / 5000 K
Indice resa cromatica / Colour rendering index / Farbwiedergabeindex:	>90
Angolo di apertura / Beam angle / Ausstrahlungswinkel:	54°
UGR	<19
Tempo di vita / Lifetime / Lebensdauer:	>75000 h (L70)
Dimensioni / Dimensions / Abmessungen:	Ø _{max} 230 mm x h 100 mm (Ø _{min} 160 mm)
Foro di preparazione / Preparation hole / Einbauöffnung:	Ø 215 mm
Peso / Weight / Gewicht:	1,1 Kg
Colore / Colour / Lieferbare Farbe:	Argento / Silver / Silber Metallic

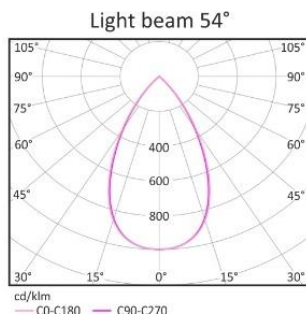


Installazione / Installation / Installation:

Ad incasso sul controsoffitto tramite molle in filo di acciaio anti-caduta.
 Recessed in a false ceiling by means of an anti-fall steel wire spring.
 Mittels Stahldraht-Federn mit Herabfallschutzsystem in abgehängte Decken.

This document is confidential, and is the property of LUX Italia, that owns the copyright. The contents of this document is subject to change without notice. Customers are advised to consult LUX Italia sales representatives before ordering. Copyright © LUX Italia. All rights reserved – www.luxitalia.eu

Modelli / Model / Modelle:


Downlight ad incasso / Recessed mounted downlights / Einbau-Downlights


	MODEL	LIGHT COLOUR	SYSTEM POWER	RATED LUMINOUS FLUX	CONTROL GEAR	EMERGENCY LIGHTING
	A45R-F	From 2700 to 5000 K	31 W	3480 lm	No Dimmable	
	A45R-FE	From 2700 to 5000 K	31 W	3480 lm	No Dimmable	✓
	A45R-D	From 2700 to 5000 K	31 W	3480 lm	DALI	
	A45R-DE	From 2700 to 5000 K	31 W	3480 lm	DALI	✓
	A45R-O	From 2700 to 5000 K	31 W	3480 lm	Open DMX	
	A45R-OE	From 2700 to 5000 K	31 W	3480 lm	Open DMX	✓

Codice prodotto / Product code / Produktcode:

A45R	FE	40	90	54
MODEL	CONTROL GEAR	LIGHT COLOUR	CRI	BEAM ANGLE
A45R <i>R = recessed</i>	F <i>on-off</i>	27 2700 K	90	54°
	D <i>DALI</i>	30 3000 K		
	O <i>OpenDMX</i>	35 3500 K		
	E <i>Emergency</i>	40 4000 K		
		45 4500 K		
		50 5000 K		

Riduzione potenza in fase di installazione / Power reduction during installation / Leistungsreduzierung während der Installation:

 DIP switch



A45							
FLUSSO	LOUT (mA)	6	5	4	3	2	1
40,0%	350	OFF	OFF	OFF	OFF	OFF	
56,0%	500	ON	OFF	OFF	OFF	OFF	
62,5%	550	OFF	ON	OFF	OFF	OFF	
73,8%	650	ON	OFF	OFF	ON	OFF	
77,8%	685	OFF	OFF	OFF	OFF	ON	
79,5%	700	ON	ON	OFF	OFF	OFF	
85,2%	750	OFF	ON	ON	OFF	OFF	
95,4%	840	ON	ON	OFF	ON	OFF	
100,0%	880	OFF	ON	OFF	OFF	ON	
102,3%	900	ON	ON	ON	OFF	OFF	
110,2%	970	ON	OFF	OFF	ON	ON	
113,6%	1000	ON	ON	ON	ON	OFF	
119,3%	1050	OFF	ON	ON	OFF	ON	
130,0%	1150	ON	ON	OFF	ON	ON	
NON PERMESSO	1200	OFF	ON	ON	ON	ON	
NON PERMESSO	1330	ON	ON	ON	ON	ON	
Limite Uscita 48V							ON

This document is confidential, and is the property of LUX Italia, that owns the copyright. The contents of this document is subject to change without notice. Customers are advised to consult LUX Italia sales representatives before ordering. Copyright © LUX Italia. All rights reserved – www.luxitalia.eu