



# H100 - H150

*Proiettori industriali*  
*Highbay luminaires*  
*Hallenstrahler*

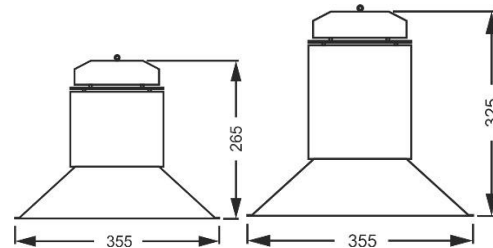


## Caratteristiche del prodotto / Product characteristics / Leuchtensystemeigenschaften


Tipo di installazione / Type of Installation / Montageart:	sospensione / suspended mounting / Hängeleuchte
Tipo di protezione / Type of protection / Schutzart:	IP 20
Sorgente / Light source / Lichtquelle:	LED
Sistema di controllo / Control gear / Betriebsgerät:	on-off, DALI, OpenDMX
Range Dimmer / Reichweitendimmer:	0-100% (Step 0,25%)
Voltaggio / Voltage / Spannung:	220 V
Potenza totale / Total power / Anschlußleistung:	115W / 165W
Flusso Luminoso / Rated luminous flux / Bemessungs-Lichtstrom:	13225 lm / 18975 lm
Efficienza apparecchio / Luminaire efficacy / Leuchtenlichtausbeute:	115 lm/W
Temperatura di colore / Colour temperature / Farbtemperatur:	2700 / 3000 / 3500 / 4000 / 4500 / 5000 K
Indice resa cromatica / Colour rendering index / Farbwiedergabeindex:	90 / 95 / 97
Angolo di apertura / Beam angle / Ausstrahlungswinkel:	120° / 160°
Tempo di vita / Lifetime / Lebensdauer:	>100000 h (L70)
Dimensioni / Dimensions / Abmessungen:	Ø 355 mm x H 265 mm / 325 mm
Peso / Weight / Gewicht:	3,3 Kg / 4,8 Kg
Colore / Colour / Lieferbare Farbe:	Argento / Silver / Silber Metallic

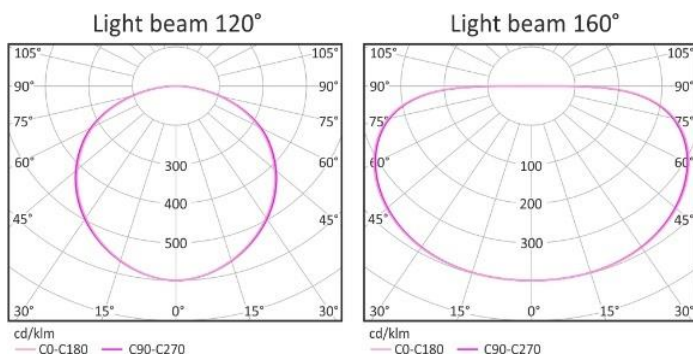

This document is confidential, and is the property of LUX Italia, that owns the copyright. The contents of this document is subject to change without notice. Customers are advised to consult LUX Italia sales representatives before ordering. Copyright © LUX Italia. All rights reserved – [www.luxitalia.eu](http://www.luxitalia.eu)

Modelli / Model / Modelle:

	MODEL	LIGHT COLOUR	CRI	SYSTEM POWER	RATED LUMINOUS FLUX	BEAM ANGLE	CONTROL GEAR
	H100-F	from 2700 K to 5000 K	90/95/97	115 W	13225 lm	120 ° / 160°	No Dimmable
	H100-D	from 2700 K to 5000 K	90/95/97	115 W	13225 lm	120 ° / 160°	DALI
	H100-O	from 2700 K to 5000 K	90/95/97	115 W	13225 lm	120 ° / 160°	Open DMX

	MODEL	LIGHT COLOUR	CRI	SYSTEM POWER	RATED LUMINOUS FLUX	BEAM ANGLE	CONTROL GEAR
	H150-F	from 2700 K to 5000 K	90/95/97	165 W	18975 lm	120 ° / 160°	No Dimmable
	H150-D	from 2700 K to 5000 K	90/95/97	165 W	18975 lm	120 ° / 160°	DALI
	H150-O	from 2700 K to 5000 K	90/95/97	165 W	18975 lm	120 ° / 160°	Open DMX

Codice prodotto / Product code / Produktcode:

H100	-	F	-	40	-	90	-	120
MODEL		CONTROL GEAR		LIGHT COLOUR		CRI		BEAM ANGLE
H 100		F <i>on-off</i>		27 2700 K		90		120°
H 150		D <i>DALI</i>		30 3000 K		95		160°
		O <i>OpenDMX</i>		35 3500 K		97		
				40 4000 K				
				45 4500 K				
				50 5000 K				

This document is confidential, and is the property of LUX Italia, that owns the copyright. The contents of this document is subject to change without notice. Customers are advised to consult LUX Italia sales representatives before ordering. Copyright © LUX Italia. All rights reserved – [www.luxitalia.eu](http://www.luxitalia.eu)