



H25

Proiettori industriali
Highbay luminaires
Hallenstrahler




Caratteristiche del prodotto / Product characteristics / Leuchtensystemeigenschaften

Tipo di installazione / Type of Installation / Montageart:	sospensione / suspended mounting / Hängeleuchte
Tipo di protezione / Type of protection / Schutzart:	IP 20
Sorgente / Light source / Lichtquelle:	LED (CREE/Osram/Samsung)
Sistema di controllo / Control gear / Betriebsgerät:	on-off, DALI, OpenDMX
Range Dimmer / Reichweitendimmer:	0-100% (Step 0,25%)
Voltaggio / Voltage / Spannung:	220 V
Potenza totale / Total power / Anschlußleistung:	33,6 W (11 W → 33,6W DIP switch)
Flusso Luminoso / Rated luminous flux / Bemessungs-Lichtstrom:	3871 lm
Efficienza apparecchio / Luminaire efficacy / Leuchtenlichtausbeute:	115,2 lm/W (per/for/für 4000K)
Temperatura di colore / Colour temperature / Farbtemperatur:	2700 / 3000 / 3500 / 4000 / 4500 / 5000 K
Indice resa cromatica / Colour rendering index / Farbwiedergabeindex:	90 / 95
Angolo di apertura / Beam angle / Ausstrahlungswinkel:	54° / 120° / 160°
Tempo di vita / Lifetime / Lebensdauer:	>100000 h (L70)
Dimensioni / Dimensions / Abmessungen:	Ø 210 mm x 160 mm
Peso / Weight / Gewicht:	1,2 Kg
Colore / Colour / Lieferbare Farbe:	Argento / Silver / Silber Metallic

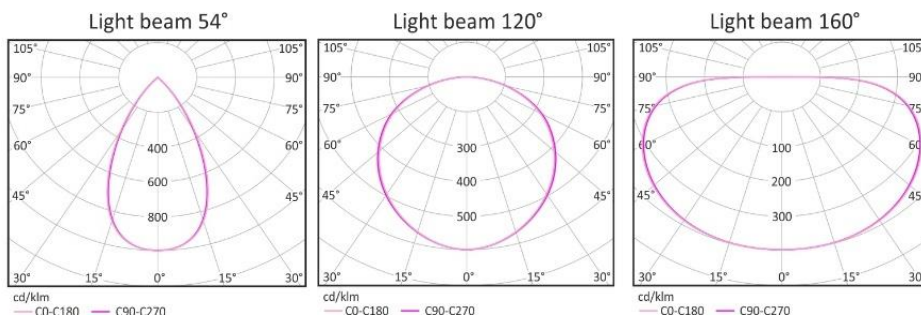

This document is confidential, and is the property of LUX Italia, that owns the copyright. The contents of this document is subject to change without notice. Customers are advised to consult LUX Italia sales representatives before ordering. Copyright © LUX Italia. All rights reserved – www.luxitalia.eu

Modelli / Model / Modelle:


	MODEL	LIGHT COLOUR	CRI	SYSTEM POWER	RATED LUMINOUS FLUX	BEAM ANGLE	CONTROL GEAR
	H25-F	from 2700 K to 5000 K	90 / 95	33,6 W	3871 lm	54° / 120° / 160°	No Dimmable
	H25-D	from 2700 K to 5000 K	90 / 95	33,6 W	3871 lm	54° / 120° / 160°	DALI
	H25-O	from 2700 K to 5000 K	90 / 95	33,6 W	3871 lm	54° / 120° / 160°	Open DMX

Codice prodotto / Product code / Produktcode:

H25	-	F	-	40	-	90	-	54
MODEL		CONTROL GEAR		LIGHT COLOUR		CRI		BEAM ANGLE
H 25		F <i>on-off</i>		27 2700 K		90		54°
		D <i>DALI</i>		30 3000 K		95		120°
		O <i>OpenDMX</i>		35 3500 K				160°
				40 4000 K				
				45 4500 K				
				50 5000 K				

Riduzione potenza in fase di installazione / Power reduction during installation / Leistungsreduzierung während der Installation:

 DIP switch



H25							
FLUSSO	LOUT (mA)	6	5	4	3	2	1
33,3%	350	OFF	OFF	OFF	OFF	OFF	
47,6%	500	ON	OFF	OFF	OFF	OFF	
49%	515	OFF	OFF	OFF	ON	OFF	
52,4%	550	OFF	ON	OFF	OFF	OFF	
61,9%	650	ON	OFF	OFF	ON	OFF	
66,7%	700	ON	ON	OFF	OFF	OFF	
71,4%	750	OFF	ON	ON	OFF	OFF	
81%	850	ON	ON	OFF	ON	OFF	
83,8%	880	OFF	ON	OFF	OFF	ON	
85,7%	900	OFF	ON	ON	ON	OFF	
93,3%	980	ON	OFF	OFF	ON	ON	
97,1%	1020	ON	OFF	ON	OFF	ON	
100%	1050	ON	ON	ON	ON	OFF	
110,9%	1164	ON	ON	OFF	ON	ON	
114,3%	1200	ON	ON	ON	OFF	ON	
127,6%	1340	ON	ON	ON	ON	ON	
Limite Uscita 48V							ON

This document is confidential, and is the property of LUX Italia, that owns the copyright. The contents of this document is subject to change without notice. Customers are advised to consult LUX Italia sales representatives before ordering. Copyright © LUX Italia. All rights reserved – www.luxitalia.eu

LUX Italia srl – Viale delle Industrie 34, 20040 Cambiago (MI) – Italy | T +39 02 9530 8160 ; F +39 02 9534 6438
Sales information: sales@luxitalia.eu ; Other information: info@luxitalia.eu