



K15

Applique
 Wall luminaire
 Wandleuchte

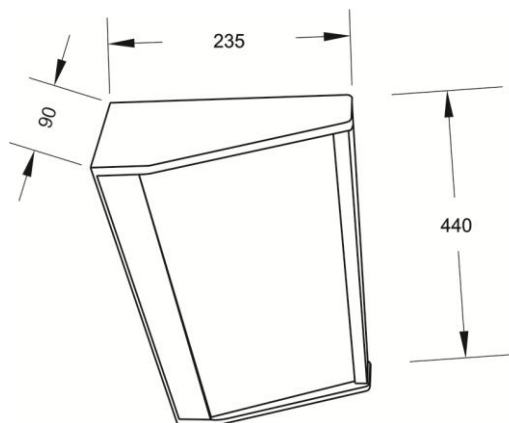


Caratteristiche del prodotto / Product characteristics / Leuchtensystemeigenschaften

Tipo di installazione / Type of Installation / Montageart: Tipo di protezione / Type of protection / Schutzart: Sorgente / Light source / Lichtquelle: Sistema di controllo / Control gear / Betriebsgerät: Voltaggio / Voltage / Spannung: Potenza totale / Total power / Anschlußleistung: Flusso Luminoso / Rated luminous flux / Bemessungs-Lichtstrom: Efficienza apparecchio / Luminaire efficacy / Leuchtenlichtausbeute: Temperatura di colore / Colour temperature / Farbtemperatur: Indice resa cromatica / Colour rendering index / Farbwiedergabeindex: Angolo di apertura / Beam angle / Ausstrahlungswinkel: Tempo di vita / Lifetime / Lebensdauer: Dimensioni / Dimensions / Abmessungen: Peso / Weight / Gewicht: Colore / Colour / Lieferbare Farbe:	a parete / wall mounting / Wandanbau IP 20 LED on-off, DALI, OpenDMX 220 V 23,2 W 2575 lm 111 lm/W 2700 / 3000 / 3500 / 4000 / 4500 / 5000 K 90 90° >75000 h (L70) 235 mm x 440 mm x 90 mm 3,5 Kg Argento / Silver / Silber Metallic
--	--

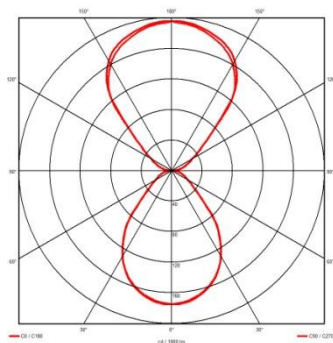

This document is confidential, and is the property of LUX Italia, that owns the copyright. The contents of this document is subject to change without notice. Customers are advised to consult LUX Italia sales representatives before ordering. Copyright © LUX Italia. All rights reserved – www.luxitalia.eu

Modelli / Model / Modelle:



MODEL	LIGHT COLOUR	SYSTEM POWER	RATED LUMINOUS FLUX	CONTROL GEAR	EMERGENCY LIGHTING
K15-600-F	from 2700 to 5000 K	23,2 W	2575 lm	No Dimmable	
K15-600-FE	from 2700 to 5000 K	23,2 W	2575 lm	No Dimmable	✓
K15-600-D	from 2700 to 5000 K	23,2 W	2575 lm	DALI	
K15-600-DE	from 2700 to 5000 K	23,2 W	2575 lm	DALI	✓
K15-600-O	from 2700 to 5000 K	23,2 W	2575 lm	Open DMX	
K15-600-OE	from 2700 to 5000 K	23,2 W	2575 lm	Open DMX	✓

Codice prodotto / Product code / Produktcode:

K15	-	FE	-	40	-	90	-	90
MODEL		CONTROL GEAR		LIGHT COLOUR		CRI		BEAM ANGLE
K15		F <i>on-off</i>		27 2700 K		80		90°
		D <i>DALI</i>		30 3000 K		90		
		O <i>OpenDMX</i>		35 3500 K				
		E <i>Emergency</i>		40 4000 K				
				45 4500 K				
				50 5000 K				

This document is confidential, and is the property of LUX Italia, that owns the copyright. The contents of this document is subject to change without notice. Customers are advised to consult LUX Italia sales representatives before ordering. Copyright © LUX Italia. All rights reserved – www.luxitalia.eu