
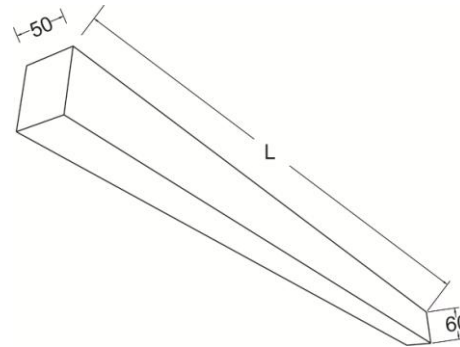


# L6


**Sistema lineare LED**  
**LED linear systems**  
**LED Linearsysteme**

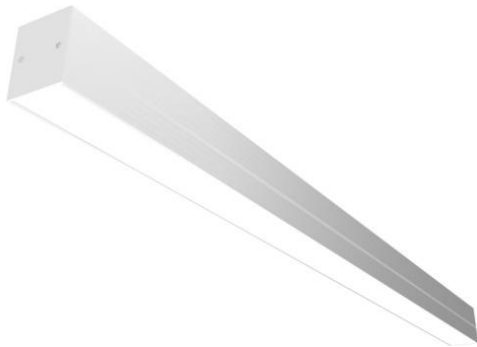

## Caratteristiche del prodotto / Product characteristics / Leuchtensystemeigenschaften

Tipo di installazione / Type of Installation / Montageart:	a plafone / ceiling mounting / Deckenanbau
Tipo di protezione / Type of protection / Schutzart:	IP 20
Sorgente / Light source / Lichtquelle:	LED
Sistema di controllo / Control gear / Betriebsgerät:	on-off, DALI, OpenDMX
Range Dimmer / Reichweitendimmer:	0-100% (Step 0,25%)
Voltaggio / Voltage / Spannung:	220 V
Potenza totale / Total power / Anschlußleistung:	17,4 W / 23,2 W / 29 W / 34,8 W (L6-1200: 9,5W (41%) → 23,2W (100%)  DIP switch)
Flusso Luminoso / Rated luminous flux / Bemessungs-Lichtstrom:	2083 lm / 2779 lm / 3474 lm / 4176 lm (Lampada) 1930 lm / 2575 lm / 3219 lm / 3870 lm (LED)
Efficienza apparecchio / Luminaire efficacy / Leuchtenlichtausbeute:	120 lm/W (per/for/für 4000K)
Temperatura di colore / Colour temperature / Farbtemperatur:	2700 / 3000 / 3500 / 4000 / 4500 / 5000 K
Indice resa cromatica / Colour rendering index / Farbwiedergabeindex:	> 90
Angolo di apertura / Beam angle / Ausstrahlungswinkel:	65°
UGR	<19
Tempo di vita / Lifetime / Lebensdauer:	>75000 h (L70)
Dimensioni / Dimensions / Abmessungen:	50 mm x 60 mm x L 900/1200/1500/1800 mm
Peso / Weight / Gewicht:	L6C-1200 (2,5 Kg) / L6C-1500 (3,0 Kg)
Colore / Colour / Lieferbare Farbe:	Bianco / White / Weiß

Light beam 65°

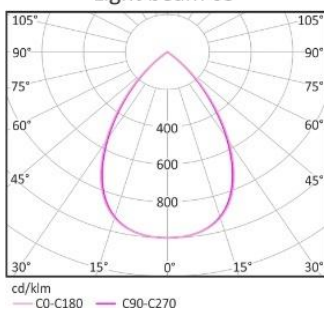

This document is confidential, and is the property of LUX Italia, that owns the copyright. The contents of this document is subject to change without notice. Customers are advised to consult LUX Italia sales representatives before ordering. Copyright © LUX Italia. All rights reserved – [www.luxitalia.eu](http://www.luxitalia.eu)

## Modelli / Model / Modelle:

**L6R** Ad incasso per controsoffitto.  
Recessed ceiling mounting installation.  
Als Einbauleuchte.



**L6S** A sospensione tramite accessorio.  
Pendant installation via an accessory.  
Als Hängeleuchte mithilfe Zubehör.



MODEL	*AVAILABLE VERSIONS	LIGHT COLOUR	SYSTEM POWER	RATED LUMINOUS FLUX	CONTROL GEAR	EMERGENCY LIGHTING
L6C-900-F	R, C, S	from 2700 to 5000 K	17,4 W	2083 lm	No Dimmable	
L6C-900-FE	R, C, S	from 2700 to 5000 K	17,4 W	2083 lm	No Dimmable	✓
L6C-900-D	R, C, S	from 2700 to 5000 K	17,4 W	2083 lm	DALI	
L6C-900-DE	R, C, S	from 2700 to 5000 K	17,4 W	2083 lm	DALI	✓
L6C-900-O	R, C, S	from 2700 to 5000 K	17,4 W	2083 lm	Open DMX	
L6C-900-OE	R, C, S	from 2700 to 5000 K	17,4 W	2083 lm	Open DMX	✓

MODEL	*AVAILABLE VERSIONS	LIGHT COLOUR	SYSTEM POWER	RATED LUMINOUS FLUX	CONTROL GEAR	EMERGENCY LIGHTING
L6C-1200-F	R, C, S	from 2700 to 5000 K	23,2 W	2779 lm	No Dimmable	
L6C-1200-FE	R, C, S	from 2700 to 5000 K	23,2 W	2779 lm	No Dimmable	✓
L6C-1200-D	R, C, S	from 2700 to 5000 K	23,2 W	2779 lm	DALI	
L6C-1200-DE	R, C, S	from 2700 to 5000 K	23,2 W	2779 lm	DALI	✓
L6C-1200-O	R, C, S	from 2700 to 5000 K	23,2 W	2779 lm	Open DMX	
L6C-1200-OE	R, C, S	from 2700 to 5000 K	23,2 W	2779 lm	Open DMX	✓

MODEL	*AVAILABLE VERSIONS	LIGHT COLOUR	SYSTEM POWER	RATED LUMINOUS FLUX	CONTROL GEAR	EMERGENCY LIGHTING
L6C-1500-F	R, C, S	from 2700 to 5000 K	29 W	3474 lm	No Dimmable	
L6C-1500-FE	R, C, S	from 2700 to 5000 K	29 W	3474 lm	No Dimmable	✓
L6C-1500-D	R, C, S	from 2700 to 5000 K	29 W	3474 lm	DALI	
L6C-1500-DE	R, C, S	from 2700 to 5000 K	29 W	3474 lm	DALI	✓
L6C-1500-O	R, C, S	from 2700 to 5000 K	29 W	3474 lm	Open DMX	
L6C-1500-OE	R, C, S	from 2700 to 5000 K	29 W	3474 lm	Open DMX	✓

MODEL	*AVAILABLE VERSIONS	LIGHT COLOUR	SYSTEM POWER	RATED LUMINOUS FLUX	CONTROL GEAR	EMERGENCY LIGHTING
L6C-1800-F	R, C, S	from 2700 to 5000 K	34,8 W	4176 lm	No Dimmable	
L6C-1800-FE	R, C, S	from 2700 to 5000 K	34,8 W	4176 lm	No Dimmable	✓
L6C-1800-D	R, C, S	from 2700 to 5000 K	34,8 W	4176 lm	DALI	
L6C-1800-DE	R, C, S	from 2700 to 5000 K	34,8 W	4176 lm	DALI	✓
L6C-1800-O	R, C, S	from 2700 to 5000 K	34,8 W	4176 lm	Open DMX	
L6C-1800-OE	R, C, S	from 2700 to 5000 K	34,8 W	4176 lm	Open DMX	✓

★

R = montaggio ad incasso / recessed mounting / Deckeneinbau

C = montaggio a plafone / ceiling mounting / Deckenanbau

S = montaggio a sospensione / suspending mounting / Hängeleuchte

This document is confidential, and is the property of LUX Italia, that owns the copyright. The contents of this document is subject to change without notice.


Customers are advised to consult LUX Italia sales representatives before ordering. Copyright © LUX Italia. All rights reserved – [www.luxitalia.eu](http://www.luxitalia.eu)

LUX Italia srl – Viale delle Industrie 34, 20040 Cambiago (MI) – Italy | T +39 02 9530 8160; F +39 02 9534 6438


Sales information: [sales@luxitalia.eu](mailto:sales@luxitalia.eu); Other information: [info@luxitalia.eu](mailto:info@luxitalia.eu)

Accessori / Accessories / Zubehöre:


L6-JL

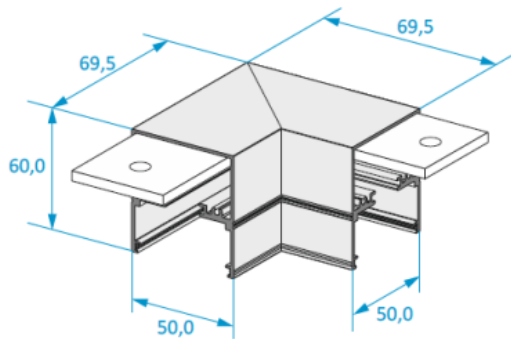



L6-JT

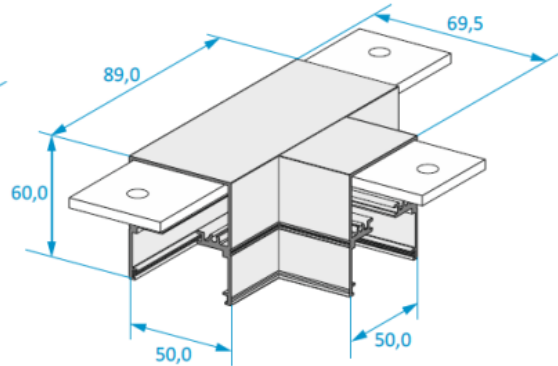

L6-JX

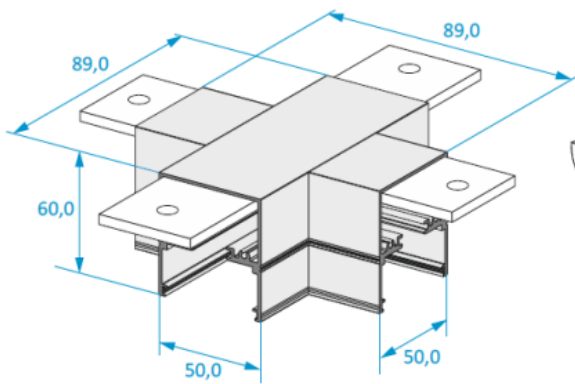

L6-JP

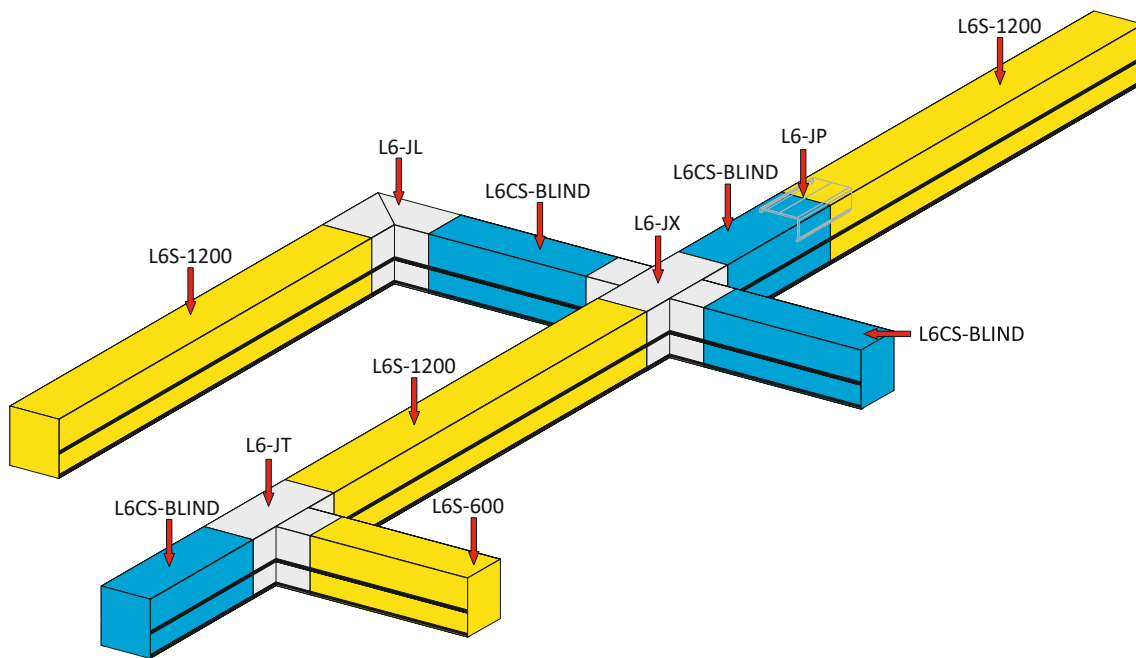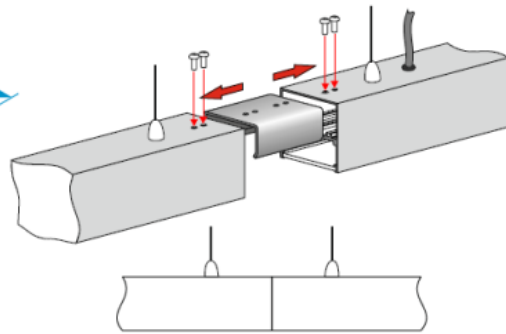


This document is confidential, and is the property of LUX Italia, that owns the copyright. The contents of this document is subject to change without notice. Customers are advised to consult LUX Italia sales representatives before ordering. Copyright © LUX Italia. All rights reserved – [www.luxitalia.eu](http://www.luxitalia.eu)

Codice prodotto / Product code / Produktcode:

L6C	1200	FE	40	90	65
MODEL	LENGTH	CONTROL GEAR	LIGHT COLOUR	CRI	BEAM ANGLE
L6C <i>C = ceiling</i>	900 <i>mm</i>	F <i>on-off</i>	27 2700 K	90	65°
L6C <i>S = suspended</i>	1200 <i>mm</i>	D <i>DALI</i>	30 3000 K		
L6R <i>R = recessed</i>	1500 <i>mm</i>	O <i>OpenDMX</i>	35 3500 K		
	1800 <i>mm</i>	E <i>Emergency</i>	40 4000 K		
			45 4500 K		
			50 5000 K		

Riduzione potenza in fase di installazione / Power reduction during installation / Leistungsreduzierung während der Installation:  
 DIP switch



L6-900					
FLUSSO	LOUT (mA)	4	3	2	1
63%	350	OFF	OFF	OFF	
90%	500	ON	OFF	OFF	
100%	550	OFF	ON	OFF	
127%	700	ON	ON	OFF	
154%	850	ON	OFF	ON	
non permesso	900	OFF	ON	ON	
non permesso	1050	ON	ON	ON	
Limite Uscita 48V					ON

L6-1500					
FLUSSO	LOUT (mA)	4	3	2	1
33%	350	OFF	OFF	OFF	
47%	500	ON	OFF	OFF	
52%	550	OFF	ON	OFF	
66%	700	ON	ON	OFF	
80%	850	ON	OFF	ON	
85%	900	OFF	ON	ON	
100%	1050	ON	ON	ON	
Limite Uscita 48V					ON

L6-1200					
FLUSSO	LOUT (mA)	4	3	2	1
41%	350	OFF	OFF	OFF	
58%	500	ON	OFF	OFF	
64%	550	OFF	ON	OFF	
82%	700	ON	ON	OFF	
100%	850	ON	OFF	ON	
105%	900	OFF	ON	ON	
123%	1050	ON	ON	ON	
Limite Uscita 48V					ON

L6-1800					
FLUSSO	LOUT (mA)	4	3	2	1
63%	350	OFF	OFF	OFF	
90%	500	ON	OFF	OFF	
100%	550	OFF	ON	OFF	
127%	700	ON	ON	OFF	
154%	850	ON	OFF	ON	
non permesso	900	OFF	ON	ON	
non permesso	1050	ON	ON	ON	
Limite Uscita 48V					ON

This document is confidential, and is the property of LUX Italia, that owns the copyright. The contents of this document is subject to change without notice. Customers are advised to consult LUX Italia sales representatives before ordering. Copyright © LUX Italia. All rights reserved – [www.luxitalia.eu](http://www.luxitalia.eu)